


TRUNCATED TAPERLOCK PLUG GAGE BLANKS

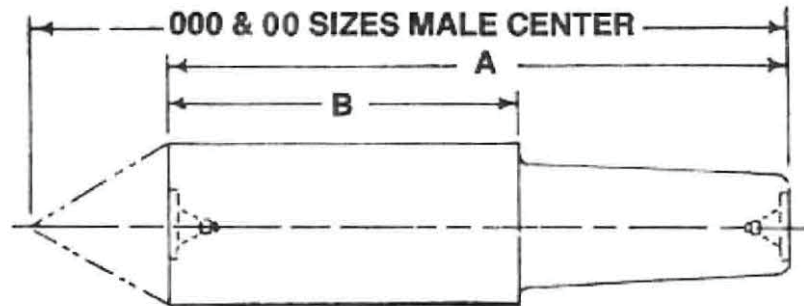

ORDER BY BLANK SIZE NUMBER	HANDLE SIZE NO.	O.D SIZE	GENERAL DIMENSIONS			
			FOR THIN RING		FOR FINE PITCH	
			A	B	A	B
000 MC	000	0.140	1-1/16	3/8		
000 FC	000	0.140	1-1/16	3/8		
00 MC	00	0.171	1-1/8	3/8		
00 FC	00	0.171	1-1/8	3/8		
8	0	0.179	1-9/32	19/32		
10	0	0.205	1-9/32	19/32		
12	0	0.229	1-9/32	19/32		
0.230	0	0.250	1-9/32	19/32		
1/4	1	0.260	1-3/4	3/4	1-9/16	9/16
5/16	1	0.322	1-3/4	3/4	1-9/16	9/16
0.365	1	0.375	1-3/4	3/4	1-9/16	9/16
3/8	2	0.385	2	1	1-11/16	11/16
7/16	2	0.448	2	1	1-11/16	11/16
1/2	2	0.520	2	1	1-11/16	11/16
9/16	3	0.572	2-1/4	1-1/4	2	1
5/8	3	0.635	2-1/4	1-1/4	2	1
11/16	3	0.697	2-1/4	1-1/4	2	1
3/4	3	0.760	2-1/4	1-1/4	2	1
13/16	3	0.835	2-1/4	1-1/4	2	1
7/8	4	0.885	2-11/16	1-1/2	2-5/16	1-1/8
15/16	4	0.947	2-11/16	1-1/2	2-5/16	1-1/8
1	4	1.010	2-11/16	1-1/2	2-5/16	1-1/8
1-1/16	4	1.072	2-11/16	1-1/2	2-5/16	1-1/8
1-1/8	4	1.145	2-11/16	1-1/2	2-5/16	1-1/8
1-3/16	5	1.197	3	1-5/8	2-11/16	1-5/16
1-1/4	5	1.260	3	1-5/8	2-11/16	1-5/16
1-5/16	5	1.322	3	1-5/8	2-11/16	1-5/16
1-3/8	5	1.385	3	1-5/8	2-11/16	1-5/16
1-7/16	5	1.447	3	1-5/8	2-11/16	1-5/16
1-1/2	5	1.520	3	1-5/8	2-11/16	1-5/16

Taperlock Blanks are made from Oil Hardening Tool Steel, hardened and drawn to Rockwell 60-62. All blanks have a precision finished shank and their lengths are closely held between centers.

To Order Contact: Gage Crib Worldwide Inc; Email: sales1@gagecrib.com